
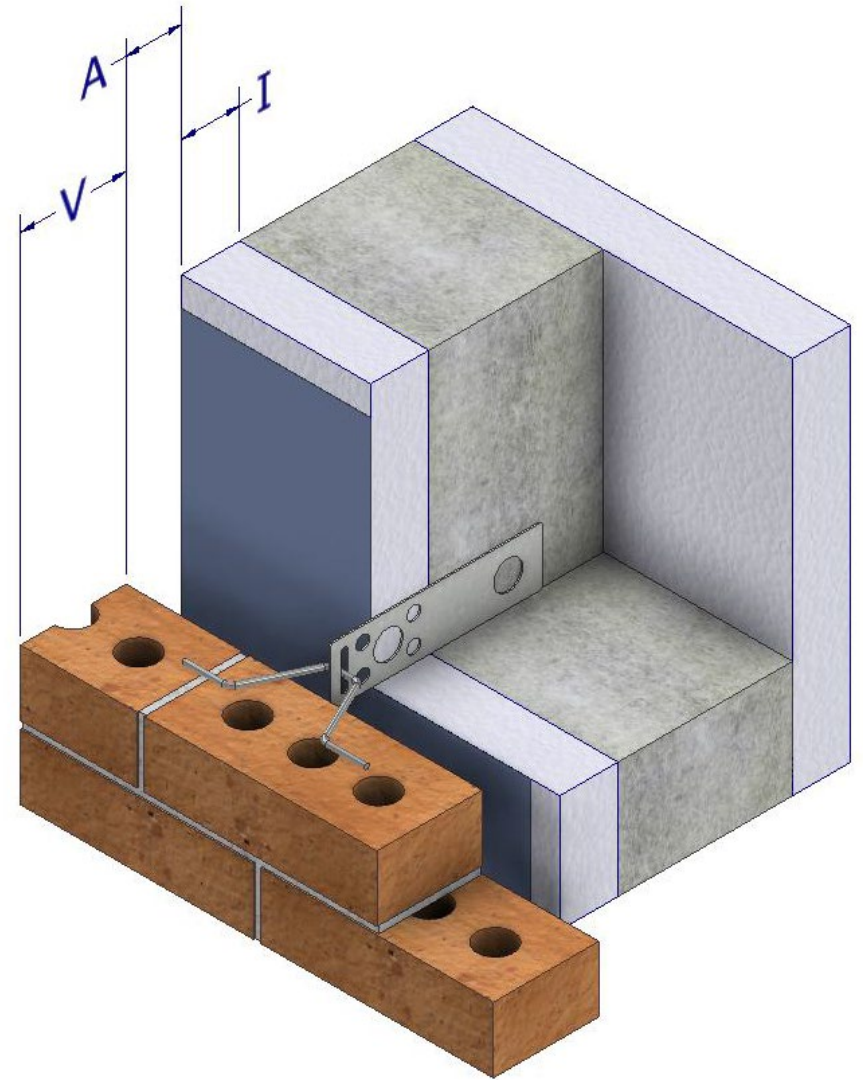


For insulated concrete form walls

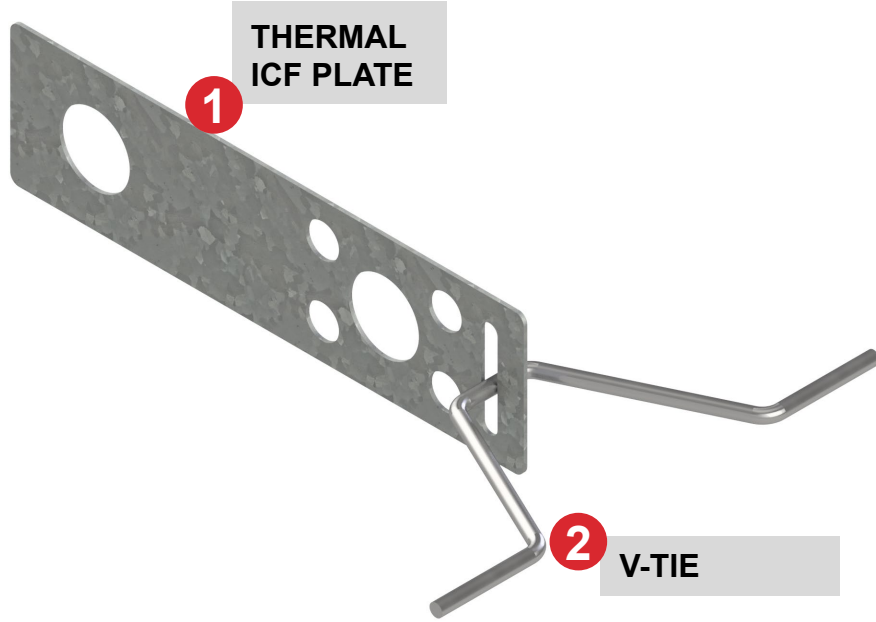

SYSTEM COMPONENTS:

- 1. Thermal ICF Plate – Holed or Slotted**
 - Thermal holes through the body of the plate reduces thermal bridging
 - Composite action is achieved between the masonry veneer and the structural backing

- 2. FERO V-Tie™**
 - Engages more mortar than any other tie

COMPONENT DIMENSIONS			
I	Insulation		<input type="checkbox"/> in <input type="checkbox"/> mm
A	Air Space		
V	Veneer Width		
TYPE:		<input type="checkbox"/> Holed	<input type="checkbox"/> Slotted
FINISH:		<input type="checkbox"/> HDG	<input type="checkbox"/> SS
# of ties required:			

The FERO Thermal Tie™ - ICF (Insulated Concrete Form) Connector is designed for easy brick tie installation on ICF walls. FERO Thermal Tie™ - ICF Connector is pre-installed with the forms and is embedded directly into the concrete. This creates a stable integration for lateral support of veneer. All FERO masonry ties are thermally broken with holes to minimize thermal conductivity.

Fasteners not included. This tie can be customized for higher loads and larger cavities. Contact FERO for engineering services if required.

Thermal ICF Plate: Carbon Steel (16 Gauge) ASTM A1011 CS Type B Stainless Steel (16 Gauge) ASTM 240 Type 304L	Hot-Dip Galvanizing: Min. 460 g/m ² /side ASTM A123, ASTM A153 Class B	All FERO products include complete documentation with descriptions, technical illustrations and images. Installation requirements and methods are clearly detailed.
V-Tie: Carbon Steel (ø3/16") ASTM A82 Stainless Steel (ø3/16") ASTM A580 Type 304	LEED/Recycled Content: Steel: 87.6% post-consumer content; 6.8% pre-consumer content Plastics: 100% post-consumer	FERO Thermal Tie™ Masonry Connectors satisfy requirements of CSA A370/ACI 530.1/ ASCE 6/ TMS 602/IBC.
Insulation Support: 100% Recycled Polyethylene		