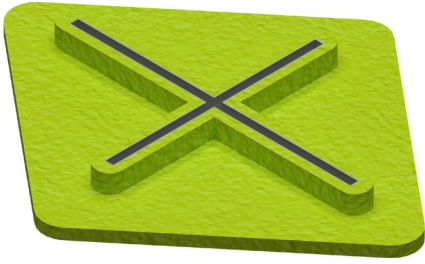
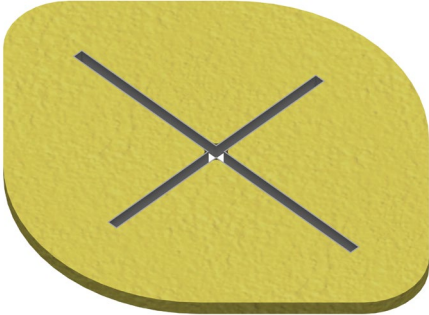
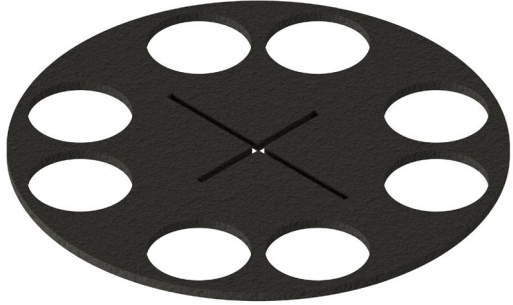
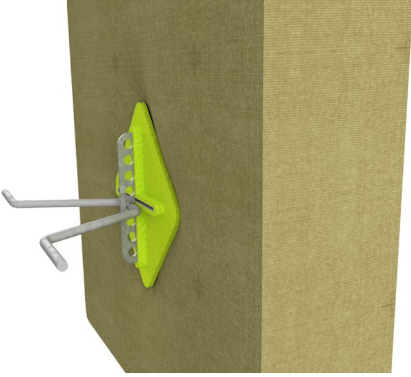
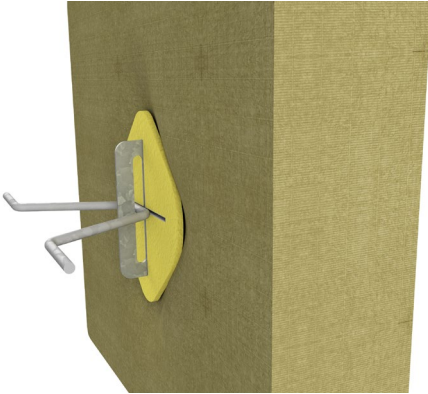
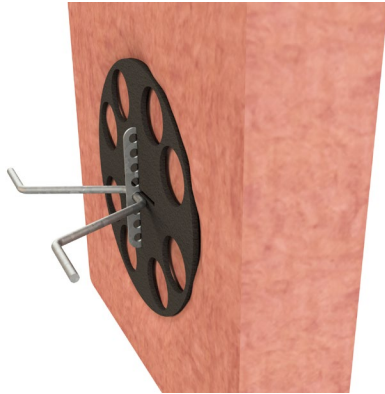


FERO® Insulation Supports are engineered to pack insulation tightly against the backup wall. When insulation is loose, it will often cause large drops in real world thermal performance from its modeled rating. The FERO Insulation Support is friction fitted onto the FERO Thermal Tie™ Masonry Connector plate and is mechanically locked in place by the FERO V-Tie™. Using FERO Insulation Supports also eliminates the need for additional insulation fasteners, lowering the number of thermal penetrations through the insulation. All FERO Insulation Supports are made of 100% recycled polyethylene and colour may vary depending on the recycled supply.

FERO OFFERS THREE TYPES OF INSULATION SUPPORT:

DIAMOND INSULATION SUPPORT	LEMON INSULATION SUPPORT	ORANGE INSULATION SUPPORT
Can be used with all FERO Thermal holed connectors and ties.	Can be used with all FERO slotted connectors and ties.	Can be used with Batt type insulation as its larger surface area holds the batt in place without compressing the insulation. Most appropriate for FERO Heavy Duty Thermal Ties and Connectors.
		
		
# of Diamond Insulation Supports Required:	# of Lemon Insulation Supports Required:	# of Orange Insulation Supports Required:

LEED / Recycled Content: Plastics: 100% post-consumer
 All FERO products include complete documentation with descriptions, technical illustrations and images. Installation requirements and methods are clearly detailed.