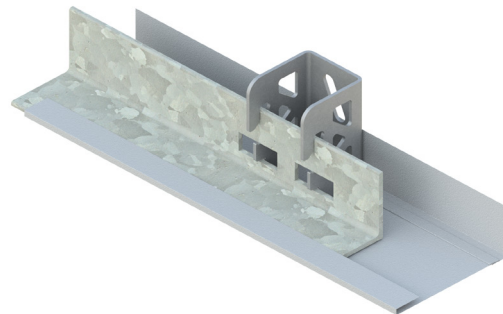



THE FAST SOFFIT CONCEALER


The FAST Soffit Concealer offers enhanced visual aesthetics by providing a clean cover at masonry openings. The concealer begins at the front of the offset shelf angle and spans the entire cavity to the backup wall, ensuring a consistent look across the entire opening. This concealing component can be used to seal the soffit when the window is behind insulation.

**AVAILABLE IN A VARIETY OF COLORS
CUSTOMIZABLE TO FIT ANY WALL CAVITY SIZE**


EASY TWO-STEP INSTALLATION:

1. Attach the back piece of the concealer to the backup wall with a screw.
2. After installing the FAST Bracket and the shelf angle, the front of the concealer wraps around and underneath the shelf angle and then clips easily into the back of the concealer.

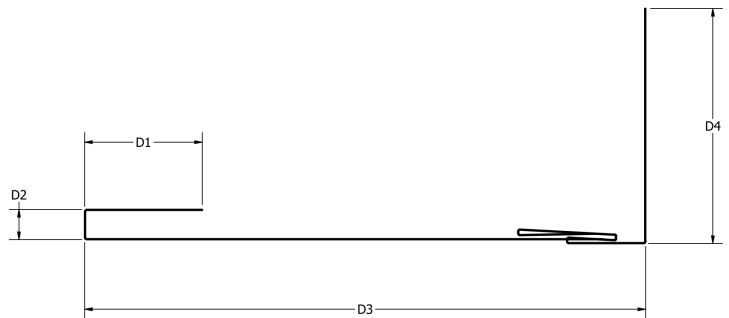
ORDER NOW:
DETAILS:

| | |
|------------------------------|--|
| Color | _____ (view colours on next page) |
| Total Length Required | _____ □ (ft) □ (m) |
| D1 | _____ □ (in) □ (mm) Suggested: 1 1/2" (38mm) |
| D2 | _____ □ (in) □ (mm) Suggested: 5/16" (9mm) |
| D3 | _____ □ (in) □ (mm) |
| D4 | _____ □ (in) □ (mm) Suggested: 3" (72.60mm) |

