



FERO

ARCHED SPINE

SUBMITTAL SHEET

Date: _____

Project Name: _____

Customer: _____

Project Address: _____

Address: _____

Bid Date: _____



Phone: _____

Email: _____

TYPE: **ARCHED SPINE**

QUANTITY	SPAN	HEIGHT	ARCHITECTURAL DETAIL REFERENCE
----------	------	--------	--------------------------------

_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

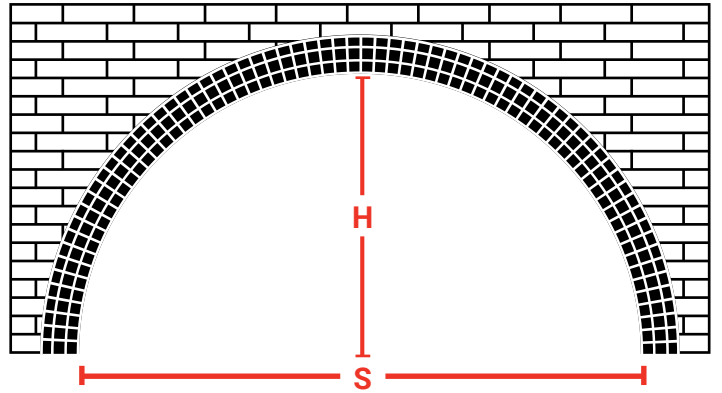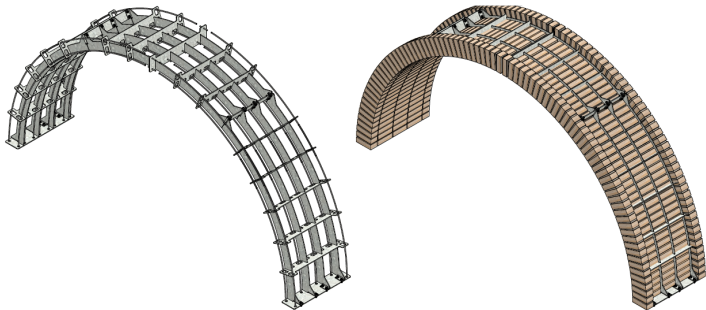

FINISH

Hot Dipped Galvanized Stainless Steel Type 304

SOFFIT STYLE



Single-Side Soldier



Double-Side Soldier



Single-Side Rowlock



Double-Side Rowlock

Copyright© 2025 FERO Corporation

FERO warrants that its brickwork support products are manufactured using the appropriate grade and type of structural steel and are hot-dip galvanized to meet or exceed industry standards for durability and corrosion resistance. Our products are designed and fabricated to comply with the relevant requirements of CSA A370, which references ASTM A123 for galvanizing, ACI 530.1 / ASCE 6 / TMS 602, which reference ASTM A153, Class B (458 g/m²), and the International Building Code (IBC), which also references ASTM A153, Class B. FERO systems are engineered to support masonry arches and brickwork with performance and longevity in mind. The properties of the steel used are well-documented, and our accompanying technical notes provide engineers, architects, and specifiers with all necessary structural data to support code-compliant designs. Please refer to our technical documentation for proper application, installation, and design parameters. FERO makes no warranty beyond the above unless explicitly stated in a separate written agreement. FERO systems are integrated with thermal break solutions to minimize thermal bridging at masonry support points. This contributes to improved envelope performance and energy code compliance.

FERO

1-877-703-4463 or 1-780-455-5098

engineering@ferocorp.com

www.ferocorp.com