





FAST® ACCESSORY PRODUCTS

THE FAST SOFFIT CONCEALER

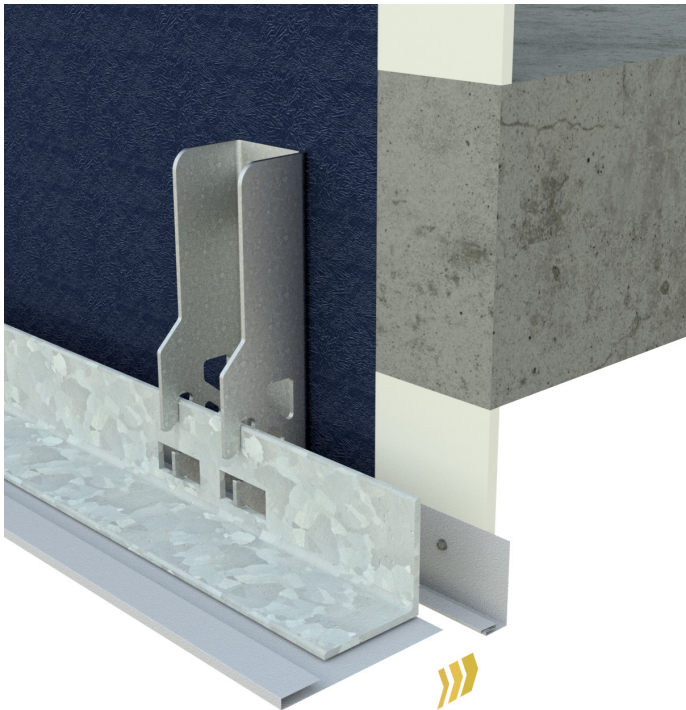

The FAST Soffit Concealer offers enhanced visual aesthetics by providing a clean cover at masonry openings. The concealer begins at the front of the offset shelf angle and spans the entire cavity to the backup wall, ensuring a consistent look across the entire opening. This concealing component can be used to seal the soffit when the window is behind insulation.

**AVAILABLE IN A VARIETY OF COLORS
CUSTOMIZABLE TO FIT ANY WALL CAVITY SIZE**

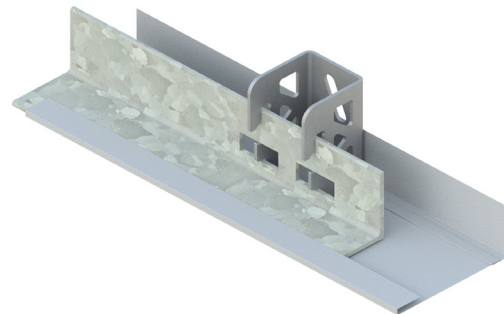

EASY TWO-STEP INSTALLATION:

1. Attach the back piece of the concealer to the backup wall with a screw.
2. After installing the FAST Bracket and the shelf angle, the front of the concealer wraps around and underneath the shelf angle and then clips easily into the back of the concealer.



ORDER NOW:

DETAILS:

Color

_____ (view colours on next page)

Total Length Required

_____ □ (ft) □ (m)

D1

_____ □ (in) □ (mm) Suggested: 1 1/2" (38mm)

D2

_____ □ (in) □ (mm) Suggested: 5/16" (9mm)

D3

_____ □ (in) □ (mm)

D4


_____ □ (in) □ (mm) Suggested: 3" (72.60mm)



Phone: (780) 455-5098 Fax: (780) 452-5969
www.ferocorp.com engineering@ferocorp.com

Copyright © 2021 FERO Corporation

FERO®, FAST®, Thermal Bracket™, FAST-FLEX™ are registered trademarks of FERO Corporation. The FERO FAST family of masonry supports, as installed may fall within the scope of one or more US or foreign patents or patent applications. Those patents include US 9,316,004; US 9,447,585; US 10,323,419; US 10,294,676; US 11,041,315; US 11,162,265; and other pending applications. Other US and Foreign Patents Pending.

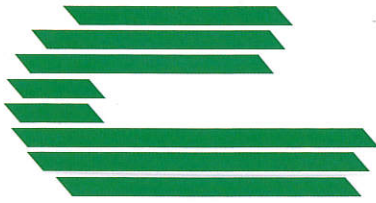

CASCADIA METALS LTD.

Cascadia Standard Colors
SMP Prepainted Steel
22ga - 30ga



POLAR WHITE



CAMBRIDGE WHITE




WHITE-WHITE




BONE WHITE



SURF WHITE



STONE GREY



REGENT GREY




PEBBLESTONE




CHARCOAL



BLACK



METRO BROWN



COFFEE BROWN



DARK BROWN



CASHMERE




ANTIQUE LINEN



WICKER



BRIARWOOD TAN




TAN




GOLD




TILE RED



BURGUNDY




DARK RED



BRIGHT RED



LABRADOR BLUE



HERON BLUE



ROYAL BLUE



SLATE BLUE



SAPPHIRE BLUE



MIST GREEN



SAGE GREEN



TURQUOISE



PACIFIC TURQUOISE




DEEP WATER GREEN




FOREST GREEN



SPRUCE GREEN



MELCHERS GREEN



DARK GREEN

Colors shown are representative of the actual colors but are limited by printing conditions. Actual pre-painted metal samples are available upon request. Additional sizes and colors may be available with a minimum order quantity. Please inquire with your Cascadia Metals Sales Representative.

ALL THE SELECTION. ONE SOURCE.



PROPERTY	SMP COATING TEST METHOD	SMP COATING SPECIFICATION
Dry Film Thickness	ASTM D 1400-94	0.75-1.85 Mil
	ASTM D 1005-95	0.90-1.15 Mil
Specular Gloss	ASTM D 523-89 @ 60°	20-35
Humidity Resistance	ASTM D 2247 (100% relative humidity @ 95°)	Passes 1,000 hrs.
Salt Spray	ASTM B 117 (5% salt spray @ 95°)	Passes 1,000 hrs.
Acid Pollutant Resistance	ASTM D 1308-87 (20% sulfuric acid 18 hrs., 10% muriatic acid 15 minutes)	No effect
Graffiti Resistance	Cleanability of Defaced Panels (spray paint, pens, etc.)	No effect
Abrasion Resistance	ASTM D 968-93 (to expose 5/32" of substrate)	25-40 Litres
Chalk Resistance	ASTM D 4214 (Florida Exposure @ 45° S)	Vertical: Rating not < 8 @ 10 yrs.
		Non-Vertical: Rating not < 7 @ 10 yrs.
Color Retention	ASTM 2244 - Hunter Units (Florida Exposure @ 45° S)	Vertical: Not > 5Δ Hunter Units @ 10 yrs.
		Non-Vertical: Not > 6Δ Hunter Units @ 10 yrs.
Adhesion	ASTM D 3359-95a (Reverse Impacted 1/16" crosshatched)	No adhesion loss
Pencil Hardness	ASTM D 3363	H-2H (NCCA II-12)
Reverse Impact	ASTM D 2794-93 (3,000 x inches of metal thickness)	Passes - No pick off with Scotch #610 tape
Flexibility T-Bend	ASTM D 4145-83 (No crack, no pick-off)	2T-4T bends, no loss of adhesion
Film Cure	ASTM D 5402 (≥ 100 double MEK rubs)	Passes
Fire Rating	E 84	Fuel contributed zero, Passes
Weatherometer	D 6695	Passes 3,000 hrs.
UV Exposure	D 4587	Passes 1,000 hrs.
Film Integrity		40 years - limited warranty

Hunter Units: a standard of key color scales and color values that are used by industry for color control. Oil Canning is a characteristic of metal roofing and not a cause for material rejection. Removable protective film is available upon request on all SMP sheet products. This protective film **MUST** be removed immediately after installation. Due to high mechanical properties, Grade 80 material is not suitable for drawing, pressing, or Pittsburgh Lock Seam applications.

Effective January 2015 and replaces all previous versions. Copyright 2015. The Cascadia Metals logo is a trademark of Cascadia Metals. Information and images are the property of Cascadia Metals and/or its affiliates and may not be reproduced without express written consent.